


CMA-BDLL/6520/E0-8 Quad-Port Antenna

XX-Pol: 2300-2690 / 2300-2690

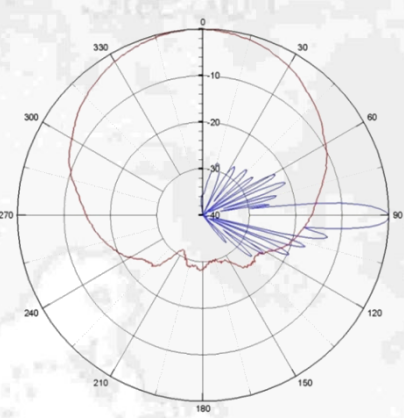

Electrical specification:

Frequency range per input (MHz)	2 x 2300-2690			2 x 2300-2690		
	2300-2400	2400-2496	2496-2690	2300-2400	2400-2496	2496-2690
Frequency band definitions (MHz)						
Polarization (°)	Dual linear ±45			Dual linear ±45		
Gain (dBi)	19.1	19.4	20.0	19.1	19.4	20.0
Horizontal = 3dB beamwidth (°) ±4°	65	62	61	65	62	61
Vertical = 3dB beamwidth (°) ±0.3°	5.7	5.5	5.2	5.7	5.5	5.2
Adjustable electrical downtilt (°)	0 - 8			0 - 8		
Front to back ratio +/-30° total power (dB)	>26			> 26		
First upper sidelobe suppression (dB)	0°, 4°, 8° >18, >17, >15			0°, 4°, 8° >18, >17, >15		
First nullfill below horizon (dB)	< 20			< 20		
Cross-polar discrimination +/-0° (dB)	> 20			> 20		
Cross-polar discrimination +/-60° (dB)	> 10			> 10		
VSWR	< 1.5:1			< 1.5:1		
Isolation between inputs (dB)	> 30			> 30		
Isolation between bands (dB)				> 30		
Antenna Efficiency*	> 94 %			> 94 %		
Inter modulation, IM3 (dBc)				<-153 @2x43 dBm, typical <-160		
Nominal impedance (Ω)				50		
Max power per input (W)				500		

Mechanical specification:

Connectors	4 x 7/16 female
Connector position	Bottom
Lightning protection	DC grounded
Height/Width/Depth mm (in)	1298 (51.1) / 374 (14.7) / 132 (5.2)
Antenna weight kg (lb)	19 (41.9)
Wind load at 42 m/s (94 mph)	
Frontal:	437 N (98 lbf)
Lateral:	85 N (19 lbf)
Rear:	550 N (124 lbf)
Survival wind speed	67 m/s (150 mph)
Colour radome	Light Grey, RAL 7035
Radome material	ASA

Mounting hardware:

Mounting bracket	2
Bracket weight (complete)	5.2 kg (11.5 lb)
Pole diameter	45-120 mm (1.8-4.7 in)
Tilt bracket	0° - 8° mechanical

Ordering information:

CMA-BDLL/6520/E0-8/MET	110470
CMA-BDLL/6520/E0-8/RET	110475